HEYCO

HEYClip™ SunRunner® Cable Clips

Double-Compression, Straight-thru Design

PANEL THICKNESS CLAMPING RANGE Minimum in.	Minimum mm.	Maximum in.	Maximum mm.	WIRE DIA. RANGE	PART NO. 304 Stainless	PART NO. 316 Stainless	DESCRIPTION	FOOTPRINT A x B in.	FOOTPRINT A x B mm.	OVERALL HEIGHT C in.	OVERALL HEIGHT C mm.
1-2 Wires - SunRunner Clip for panels up to .090˝ (2,3 mm) thick											
.06	1,4	.09	2,3	.20˝ (5,1 mm)-.30˝ (7,6 mm) each cable	**S6405**	**S6490**	SunRunner® Clip 100 Pack	.97 x .50	24,6 x 12,7	.39	9,9
					S6445	**S6495**	SunRunner® Clip Bulk				
1-2 Wires - SunRunner EZ Clip for panels up to .250˝ (6,4 mm) thick											
.09	2,3	.25	6,4	.20˝ (5,1 mm)-.30˝ (7,6 mm) each cable	**S6407**	-	SunRunner® EZ Clip 100 Pack	.97 x .50	24,6 x 12,7	.41	10,4
					S6447	-	SunRunner® EZ Clip Bulk				
4 Wires - SunRunner 4 Clip for panels up to .125˝ (3,2 mm) thick											
.06	1,4	.13	3,2	.20˝ (5,1 mm)-.30˝ (7,6 mm) each cable	**S6443**	-	SunRunner® 4 Clip 100 Pack	1.34 x .50	33,8 x 12,7	.36	9,1
					S6483	-	SunRunner® 4 Clip Bulk				
4 Wires - SunRunner 4 EZ Clip for panels up to .250˝ (6,4 mm) thick											
.13	3,2	.25	6,4	.20˝ (5,1 mm)-.30˝ (7,6 mm) each cable	**S6400**	-	SunRunner® 4 EZ Clip 100 Pack	1.33 x .50	33,8 x 12,7	.36	9,1
					S6440	-	SunRunner® 4 EZ Clip Bulk				

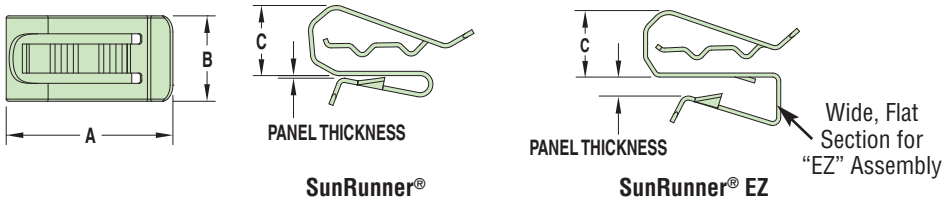

SunRunner® **SunRunner® EZ**

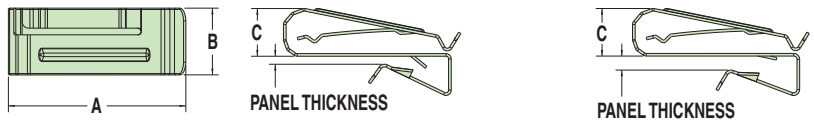

SunRunner® 4 **SunRunner® 4 EZ**

SunRunner® EZ with (optional) UL Approved SunBundler (page 1-11) looped through slot

- Heyco's SunRunner and SunRunner EZ's robust "double-compression" design securely holds from (1) 12 gauge USE-2 to (2) 10 gauge PV-1000V solar wires.
- Also for use with other cables from .20˝ (5,1 mm) to .30˝ (7,6 mm) in diameter.
- Heyco SunRunner Clips are designed to provide a better method for PV module wire management **and may be used wherever single or multiple cable management is needed**.
- Smooth clip edges prevent damage to cable insulation.
- Locking tabs securely fasten clips to module extrusions, **or other panels**.
- Generous lead in for installation without tools.
- Screwdriver slot for easy removal or movement of clips if necessary.
- Neatly dresses cables on PV panel frames or along mounting channels.
- Constructed from corrosion resistant 304 stainless steel, not for use in a marine salt water environment.
- 316 stainless steel now available for marine and other harsh environments.
- **SunRunner EZ's are designed for thicker module frames** as well as racking – accommodates profiles up to .250˝ (6,4 mm) thick!
- **SunRunner 4 designed to hold up to (4) 12 gauge USE-2 or (4) 10 gauge PV-1000V solar wires**.
- SunRunner 4 is constructed from heat treated 410 stainless steel for excellent strength and corrosion protection for outdoor exposure.
- DFARS Compliant.

Material	.025˝ thick 304 or 316 stainless steel (SunRunner and SunRunner EZ) .020˝ thick 410 stainless steel (SunRunner 4 and SunRunner 4 EZ)
Certifications	c UL us Certified by UL for Compliance with both Canadian and US Requirements under File E54523
Temperature Range	-40°F (-40°C) to 572°F (300°C)

Quick Specs