




0766 Specification Sheet

The Original Flashed PV Junction Box for Deep Tile & Slate Roofs

0766 Ratings

- ETL listed and labeled
- Conforms to UL 1741 Standard
- UL50 Type 3R, 11th edition electrical equipment enclosures
- CSA C22.2 No. 290 Nema Type 3R
- 600 VDC/115 amps
- 240 VAC/60 amps
- Ambient temperature rating (-35°C) - (+75°C)
- 2/12—12/12 slopes

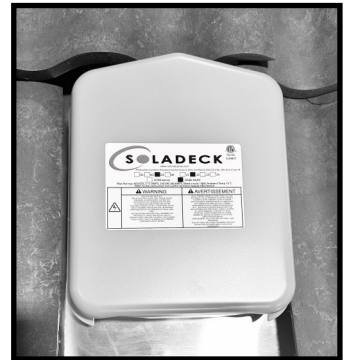

Specifications

- Base material G90 galvanized steel, powder coated black or gray
- Seamless draw (stamped) with a 12.5" x 13.5" flashing
- 30"x30" Dead soft aluminum counter flashing
- 6" height with an interior workspace of 432 cubic inches
- Approximate weight of 11.4lb
- 35mm slotted din rail, installed
- Five roof deck knockouts, size (3) .5", (1) .75" and (1) 1"
- Five position ground block for wire size 14-4awg
- Sealant and cleaning wipe included in installation kit

