

## LG NeON<sup>®</sup> 2 72cell

LG400N2W-A5

### 72 cell

LG's new module, LG NeON<sup>®</sup> 2, adopts Cello technology. Cello technology replaces 3 busbars with 12 thin wires to enhance power output and reliability. LG NeON<sup>®</sup> 2 demonstrates LG's efforts to increase customer's value beyond efficiency. It features enhanced warranty, durability, performance under real environment, and aesthetic design suitable for roofs.



#### Enhanced Performance Warranty

LG NeON<sup>®</sup> 2 has an enhanced performance warranty. The annual degradation has fallen from -0.6%/yr to -0.55%/yr. Even after 25 years, the cell guarantees 1.2% more output than the previous LG NeON<sup>®</sup> 2 modules.




#### High Power Output

Compared with previous models, the LG NeON<sup>®</sup> 2 has been designed to significantly enhance its output efficiency, thereby making it efficient even in limited space.



#### Aesthetic Roof

LG NeON<sup>®</sup> 2 has been designed with aesthetics in mind; thinner wires that appear all black at a distance. The product may help increase the value of a property with its modern design.



#### Outstanding Durability

With its newly reinforced frame design, LG has extended the warranty of the LG NeON<sup>®</sup> 2 for an additional 2 years. Additionally, LG NeON<sup>®</sup> 2 can endure a front load up to 5400 Pa, and a rear load up to 4300 Pa.



#### Better Performance on a Sunny Day

LG NeON<sup>®</sup> 2 now performs better on sunny days thanks to its improved temperature coefficient.



#### Double-Sided Cell Structure

The rear of the cell used in LG NeON<sup>®</sup> 2 will contribute to generation, just like the front; the light beam reflected from the rear of the module is reabsorbed to generate a great amount of additional power.

#### About LG Electronics

LG Electronics is a global player who has been committed to expanding its operations with the solar market. The company first embarked on a solar energy source research programs in 1985, supported by LG Group's vast experience in the semi-conductor, LCD, chemistry, and materials industries. In 2010, LG Solar successfully released its first Mono X<sup>®</sup> series to the market, which is now available in 32 countries. The LG NeON<sup>®</sup> (previously known as Mono X<sup>®</sup> NeON) and the LG NeON<sup>®</sup> 2 won the "Intersolar Award" in 2013 and 2015, which demonstrates LG Solar's lead, innovations and commitment to the industry.

## Mechanical Properties

Cells	6 x 12
Cell Vendor	LG
Cell Type	Monocrystalline / N-type
Cell Dimensions	161.7 x 161.7 mm / 6 inches
# of Busbar	12 (Multi Wire Busbar)
Dimensions (L x W x H)	2024 x 1024 x 40 mm 79.69 x 40.31 x 1.57 inch
Front Load	5400Pa
Rear Load	4300Pa
Weight	21.7 kg
Connector Type	MC4
Junction Box	IP68 with 3 Bypass Diodes
Cables	1200 mm x 2 ea
Glass	High Transmission Tempered Glass
Frame	Anodized Aluminium

## Certifications and Warranty


Certifications	IEC 61215, IEC 61730-1/-2 UL 1703 IEC 61701 (Salt mist corrosion test) IEC 62716 (Ammonia corrosion test) ISO 9001
Module Fire Performance (USA)	Type 1
Fire Rating (CANADA)	Class C (ULC / ORD C1703)
Product Warranty	12 years
Output Warranty of Pmax	Linear warranty**

\*\* 1) 1st year : 98%, 2) After 1st year : 0.55% annual degradation, 3) 25 years : 84.8%

## Temperature Characteristics

NOCT	45 ± 3 °C
Pmpp	-0.36%/°C
Voc	-0.26%/°C
Isc	0.02 %/°C

## Characteristic Curves

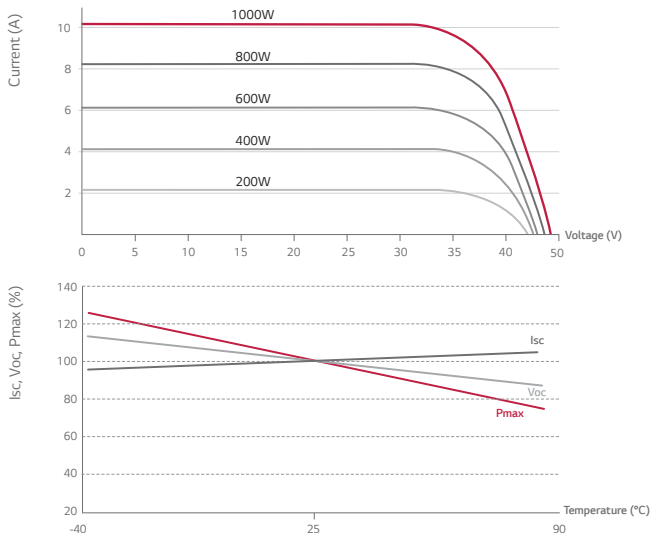

## Electrical Properties (STC \*)

Module	400W
Maximum Power (Pmax)	400
MPP Voltage (Vmpp)	40.6
MPP Current (Impp)	9.86
Open Circuit Voltage (Voc)	49.3
Short Circuit Current (Isc)	10.47
Module Efficiency	19.3
Operating Temperature	-40 ~ +90
Maximum System Voltage	1500 (UL)
Maximum Series Fuse Rating	20
Power Tolerance (%)	0 ~ +3



\* STC (Standard Test Condition): Irradiance 1,000 W/m<sup>2</sup>, Ambient Temperature 25 °C, AM 1.5  
\* The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.  
\* The Typical change in module efficiency at 200W/m<sup>2</sup> in relation to 1000W/m<sup>2</sup> is -2.0%.

## Electrical Properties (NOCT\*)

Module	400W
Maximum Power (Pmax)	296
MPP Voltage (Vmpp)	37.6
MPP Current (Impp)	7.88
Open Circuit Voltage (Voc)	46.1
Short Circuit Current (Isc)	8.41

\* NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, ambient temperature 20 °C, wind speed 1m/s

## Dimensions (mm/in)

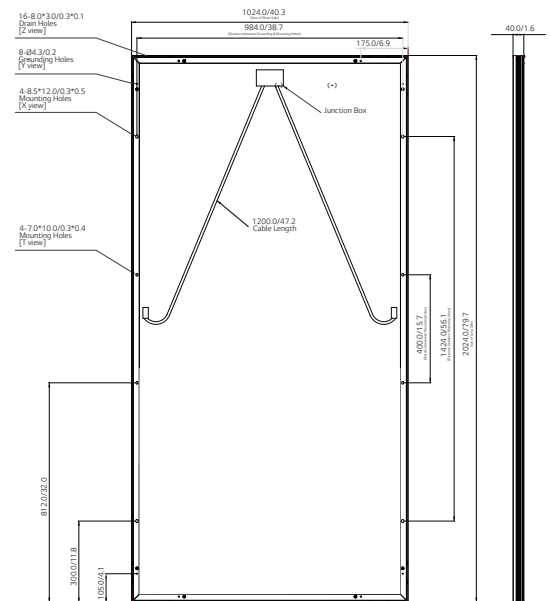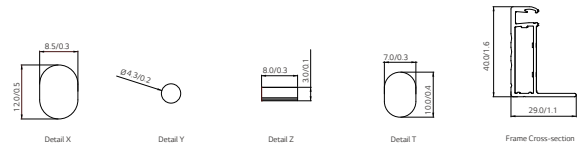

\* The distance between the center of the mounting/grounding holes.



North America Solar Business Team  
LG Electronics U.S.A. Inc  
1000 Sylvan Ave, Englewood Cliffs, NJ 07632

Contact: lg.solar@lge.com  
www.lgsolarusa.com

Product specifications are subject to change without notice.

Copyright © 2017 LG Electronics. All rights reserved.  
01/01/2017

Innovation for a Better Life

