

# Harvest the Sunshine

# 440W




# JA SOLAR



## JAM54D41 MB USDC-J/F n-Type Double Glass Bifacial Modules

\*Made with USA Domestic Content (See Component Chart Below)

### Premium Cells



MBB Half-Cell Technology

# 26%

Up To

Cell Conversion Efficiency


### Premium Modules

Higher power generation better LCOE

n-Type with very lower LID

Better temperature coefficient

Better low irradiance response

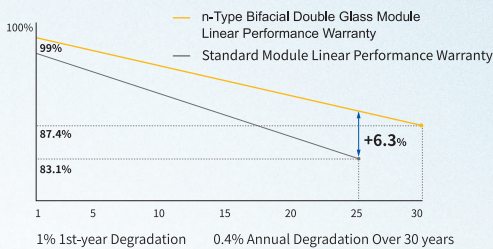


25-year product warranty

30-year linear power output warranty


### Comprehensive Certificates

- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing

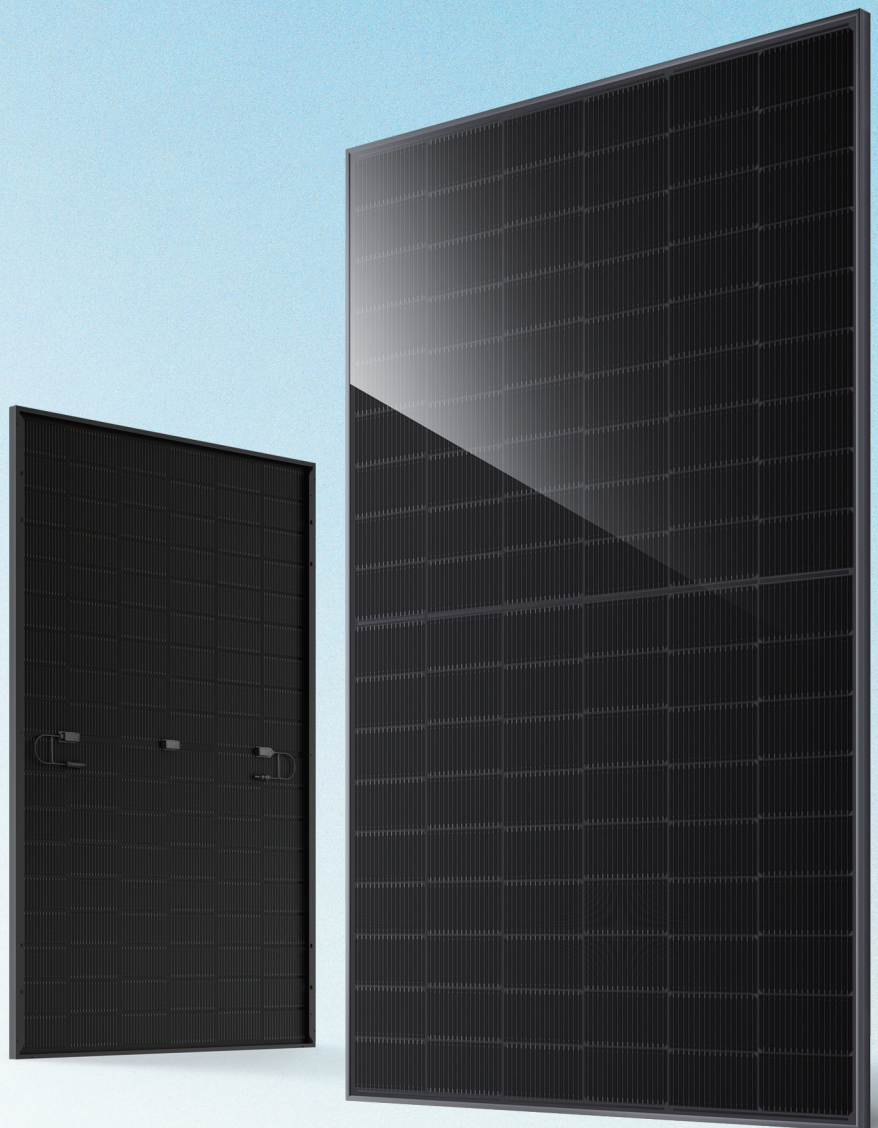

# DEEP BLUE 4.0 Pro

# JAM54D41 MB n-Type Double Glass Bifacial Modules

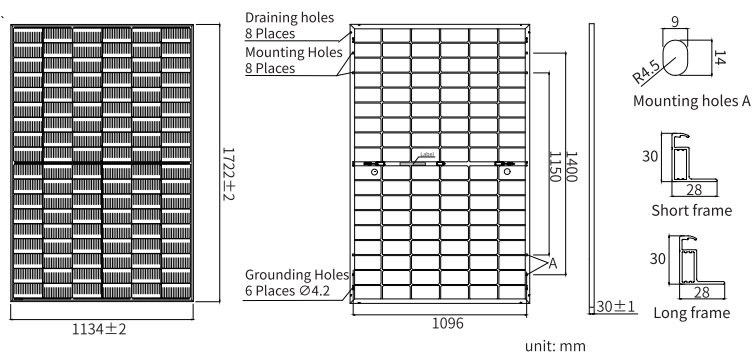

## MECHANICAL PARAMETERS

|                                    |                                     |
|------------------------------------|-------------------------------------|
| Cell                               | Mono                                |
| Weight                             | 21.5kg                              |
| Dimensions                         | 1722±2mm × 1134±2mm × 30±1mm        |
| Cable Cross Section Size           | 4mm <sup>2</sup> (IEC), 12 AWG(UL)  |
| No. of cells                       | 108(6 × 18)                         |
| Junction Box                       | IP68, 3diodes                       |
| Connector                          | QC 4.10-351/ MC4-EVO2/MC4-EVO2A     |
| Cable Length (Including Connector) | 1200mm(+)/1200mm(-)                 |
| Front Glass/Back Glass             | 1.6mm/1.6mm                         |
| Packaging Configuration            | 36pcs/Pallet, 864pcs/40HQ Container |

Customized frame color and cable length available upon request

## ELECTRICAL PARAMETERS AT STC

| TYPE   | JAM54D41<br>-415/MB   | JAM54D41<br>-420/MB | JAM54D41<br>-425/MB | JAM54D41<br>-430/MB | JAM54D41<br>-435/MB | JAM54D41<br>-440/MB |
|--|---|---------------------|---------------------|---------------------|---------------------|---------------------|
| Rated Maximum Power(Pmax) [W]                      | 415   | 420                 | 425                 | 430                 | 435                 | 440                 |
| Open Circuit Voltage (Voc) [V]                     | 38.00   | 38.28               | 38.56               | 38.84               | 39.11               | 39.38               |
| Maximum Power Voltage(Vmp) [V]                     | 32.13   | 32.38               | 32.64               | 32.88               | 33.13               | 33.37               |
| Short Circuit Current(Isc) [A]                     | 13.60   | 13.65               | 13.70               | 13.75               | 13.80               | 13.85               |
| Maximum Power Current(Imp) [A]                     | 12.92   | 12.97               | 13.02               | 13.08               | 13.13               | 13.18               |
| Module Efficiency [%]                              | 21.3  | 21.5                | 21.8                | 22.0                | 22.3                | 22.5                |
| Power Tolerance                                    | ±2%   |                     |                     |                     |                     |                     |
| Temperature Coefficient of Isc(α <sub>Isc</sub> )  | +0.045%/°C  |                     |                     |                     |                     |                     |
| Temperature Coefficient of Voc (β <sub>Voc</sub> ) | -0.250%/°C  |                     |                     |                     |                     |                     |
| Temperature Coefficient of Pmax(γ <sub>Pmp</sub> ) | -0.290%/°C  |                     |                     |                     |                     |                     |
| STC  | Irradiance 1000W/m <sup>2</sup> , cell temperature 25°C, AM1.5G |                     |                     |                     |                     |                     |

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.


## ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

| TYPE                           | JAM54D41<br>-415/MB | JAM54D41<br>-420/MB | JAM54D41<br>-425/MB | JAM54D41<br>-430/MB | JAM54D41<br>-435/MB | JAM54D41<br>-440/MB |
|--------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Rated Max Power(Pmax) [W]      | 448                 | 454                 | 459                 | 464                 | 470                 | 475                 |
| Open Circuit Voltage(Voc) [V]  | 38.00               | 38.28               | 38.56               | 38.84               | 39.11               | 39.38               |
| Max Power Voltage(Vmp) [V]     | 32.13               | 32.38               | 32.64               | 32.88               | 33.13               | 33.37               |
| Short Circuit Current(Isc) [A] | 14.69               | 14.74               | 14.80               | 14.85               | 14.90               | 14.96               |
| Max Power Current(Imp) [A]     | 13.95               | 14.01               | 14.06               | 14.12               | 14.18               | 14.24               |
| Irradiation Ratio (rear/front) | 10%                 |                     |                     |                     |                     |                     |

### \*COMPONENT | USDC CODE

|       |   |             |   |              |   |            |   |               |   |            |   |
|-------|---|-------------|---|--------------|---|------------|---|---------------|---|------------|---|
| Cells | C | Front Glass | G | Backglass    | B | Edge Seals | S | Bus Ribbons   | R | Production | X |
| Frame | F | Encapsulant | E | Junction Box | J | Pottants   | P | Bypass Diodes | D |            |   |

## CHARACTERISTICS

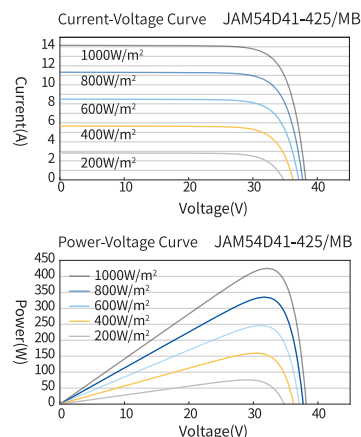

## OPERATING CONDITIONS

|                            |                                 |
|----------------------------|---------------------------------|
| Maximum System Voltage     | 1500V DC                        |
| Operating Temperature      | -40°C~+85°C                     |
| Maximum Series Fuse Rating | 30A                             |
| Maximum Static Load, Front | 5400Pa(112 lb/ft <sup>2</sup> ) |
| Maximum Static Load, Back  | 2400Pa(50 lb/ft <sup>2</sup> )  |
| NOCT                       | 45±2°C                          |
| Bifaciality                | 80%±10%                         |
| Safety Class               | Class II                        |
| Fire Performance           | UL Type 38/Class C              |



### USA Subsidiary

JA Solar USA  
2570 North First Street, Suite 360 San Jose, CA 95131, USA  
Tel: 1-408-586-0000 Fax: 1-408-956-9505  
E-mail: sales@jasolar.com marketing@jasolar.com www.jasolar.com

Specifications subject to technical changes and tests.  
JA Solar reserves the right of final interpretation.

Version No. : Global-EN-20260227C