

Q.PEAK DUO XL-G11S SERIES



585-600 Wp | 156 Cells
21.5 % Maximum Module Efficiency

MODEL Q.PEAK DUO XL-G11S.3/BFG



Bifacial energy yield gain of up to 21%

Bifacial Q.ANTUM solar cells make efficient use of light shining on the module rear-side for radically improved LCOE.



Low electricity generation costs

Q.ANTUM DUO technology with optimized module layout to boost module power and improve LCOE.



A reliable investment

Double glass module design enables extended lifetime with 12-year product warranty and improved 30-year performance warranty¹.



Enduring high performance

Long-term yield security with Anti LID and Anti PID Technology², Hot-Spot Protect.



Frame for versatile mounting options

High-tech aluminum alloy frame protects from damage, enables use of a wide range of mounting structures and is certified regarding IEC for high snow (5400 Pa) and wind loads (2400 Pa).



Innovative all-weather technology

Optimal yields, whatever the weather with excellent low-light and temperature behavior.

¹ See data sheet on rear for further information.

² APT test conditions according to IEC/TS 62804-1:2015 method B (-1500V, 168 h) including post treatment according to IEC 61215-1-1 Ed. 2.0 (CD)

The ideal solution for:




Ground-mounted solar power plants



Q.PEAK DUO XL-G11S SERIES

Mechanical Specification

| | |
|--------------|---|
| Format | 96.9 in × 44.6 in × 1.38 in (including frame) (2462 mm × 1134 mm × 35 mm) |
| Weight | 76.9 lbs (34.9 kg) |
| Front Cover | 0.08 in (2.0 mm) thermally pre-stressed glass with anti-reflection technology |
| Back Cover | 0.08 in (2.0 mm) semi-tempered glass |
| Frame | Anodised aluminium |
| Cell | 6 × 26 monocrystalline Q.ANTUM solar half cells |
| Junction box | 2.09-3.98 × 1.26-2.36 × 0.59-0.71 in (53-101 mm × 32-60 mm × 15-18 mm), Protection class IP67, with bypass diodes |
| Cable | 4 mm ² Solar cable; (+) ≥ 29.5 in (750 mm), (-) ≥ 13.8 in (350 mm) |
| Connector | Stäubli MC4; Stäubli MC4-Evo2; - IP68 |

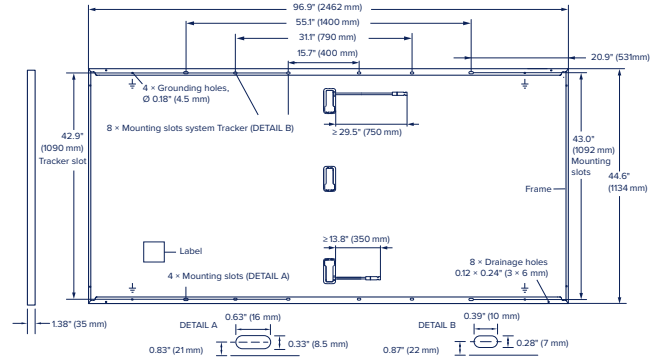

Electrical Characteristics

| POWER CLASS | | | 585 | 590 | 595 | 600 |
|---|------------------------------------|---------------|--------|--------|--------|--------|
| MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC ¹ (POWER TOLERANCE +5 W/-0 W) | | | | | | |
| Minimum | Power at MPP ¹ | P_{MPP} [W] | 585 | 590 | 595 | 600 |
| | Short Circuit Current ¹ | I_{SC} [A] | 13.72 | 13.74 | 13.77 | 13.80 |
| | Open Circuit Voltage ¹ | V_{OC} [V] | 53.57 | 53.60 | 53.63 | 53.66 |
| | Current at MPP | I_{MPP} [A] | 13.07 | 13.12 | 13.17 | 13.22 |
| | Voltage at MPP | V_{MPP} [V] | 44.75 | 44.96 | 45.18 | 45.39 |
| | Efficiency ¹ | η [%] | ≥ 21.0 | ≥ 21.1 | ≥ 21.3 | ≥ 21.5 |

Bifaciality of P_{MPP} and I_{SC} 70% ± 5% • Bifaciality given for rear side irradiation on top of STC (front side) • According to IEC 60904-1-2


¹ Measurement tolerances P_{MPP} ± 3%; I_{SC} , V_{OC} ± 5% at STC: 1000 W/m²; *at BSTC: 1000 W/m² + ϕ × 135 W/m², ϕ = 70% ± 5%, 25 ± 2 °C, AM 1.5 according to IEC 60904-3

MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT²

| | | | | | | |
|---------|-----------------------|---------------|-------|-------|-------|-------|
| Minimum | Power at MPP | P_{MPP} [W] | 440.5 | 444.2 | 448.0 | 451.8 |
| | Short Circuit Current | I_{SC} [A] | 11.05 | 11.07 | 11.09 | 11.11 |
| | Open Circuit Voltage | V_{OC} [V] | 50.67 | 50.69 | 50.72 | 50.75 |
| | Current at MPP | I_{MPP} [A] | 10.30 | 10.34 | 10.38 | 10.42 |
| | Voltage at MPP | V_{MPP} [V] | 42.79 | 42.97 | 43.15 | 43.34 |

¹ Measurement tolerances P_{MPP} ± 3%; I_{SC} ; V_{OC} ± 5% at STC: 1000 W/m², 25 ± 2 °C, AM 1.5 according to IEC 60904-3 • ² 800 W/m², NMOT, spectrum AM 1.5

Qcells PERFORMANCE WARRANTY

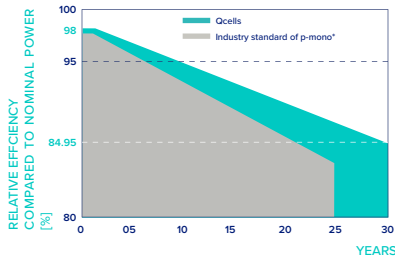


At least 98% of nominal power during first year. Thereafter max. 0.45% degradation per year. At least 93.95% of nominal power up to 10 years. At least 84.95% of nominal power up to 30 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Qcells sales organisation of your respective country.

*Standard terms of guarantee for the 5 PV companies with the highest production capacity in 2021 (February 2021)

PERFORMANCE AT LOW IRRADIANCE

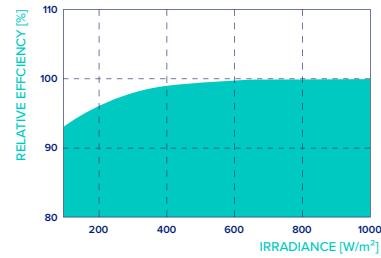

Typical module performance under low irradiance conditions in comparison to STC conditions (25 °C, 1000 W/m²).

TEMPERATURE COEFFICIENTS

| | | | | | |
|--------------------------------------|----------------|-------|--------------------------------------|---------------|-----------------------|
| Temperature Coefficient of I_{SC} | α [%/K] | +0.04 | Temperature Coefficient of V_{OC} | β [%/K] | -0.27 |
| Temperature Coefficient of P_{MPP} | γ [%/K] | -0.34 | Nominal Module Operating Temperature | NMOT [°F] | 108 ± 5.4 (42 ± 3 °C) |

Properties for System Design

| | | | | |
|--|-------------------------------|----------------------------|---|--|
| Maximum System Voltage | V_{SYS} [V] | 1500 | PV module classification | Class II |
| Maximum Series Fuse Rating | [A DC] | 25 | Fire Rating based on ANSI/UL 61730 | TYPE 29 ⁴ |
| Max. Design Load, Push/Pull ³ | [lbs/ft ²] / [Pa] | 75 (3600 Pa)/33 (1600 Pa) | Permitted Module Temperature on Continuous Duty | -40 °F up to +185 °F (-40 °C up to +85 °C) |
| Max. Test Load, Push/Pull ³ | [lbs/ft ²] / [Pa] | 113 (5400 Pa)/50 (2400 Pa) | | |

³ See Installation Manual

⁴ New Type is similar to Type 3 but with metallic frame

Qualifications and Certificates

UL 61730, CE-compliant,
IEC 61215:2016,
IEC 61730:2016,
U.S. Patent No. 9,893,215
(solar cells)



Qcells pursues minimizing paper output in consideration of the global environment.

Note: Installation instructions must be followed. Contact our technical service for further information on approved installation of this product.

Hanwha Q CELLS America Inc. 400 Spectrum Center Drive, Suite 1400, Irvine, CA 92618, USA | TEL +1 949 748 59 96 | EMAIL hqc-inquiry@qcells.com | WEB www.qcells.com

qcells