



Positive cable




Negative cable

## Technical Specification

### 0000AWG Power Cable

Cable type	UL10269-00AWG
Current Rating	200 A
Voltage Rating	1000V
Temperature rating	105°C
Reference Standard	UL758 UL1581
Conductor	Tinned or bare copper conductor, stranded
Insulation	PVC insulation
Conductor diameter	10.8mm
Conductor cross-sectional area	67.43mm <sup>2</sup>
Cable diameter	17.0mm
Copper cable terminal	SC70-10 (M10)
Copper cable terminal material	Tin-plated copper

Code	Designation	Length	Color	Copper cable terminal
161412100465	2000mm Positive cable	2000mm	Red	SC70-10 (M10)
161412100466	2000mm Negative cable	2000mm	Black	SC70-10 (M10)

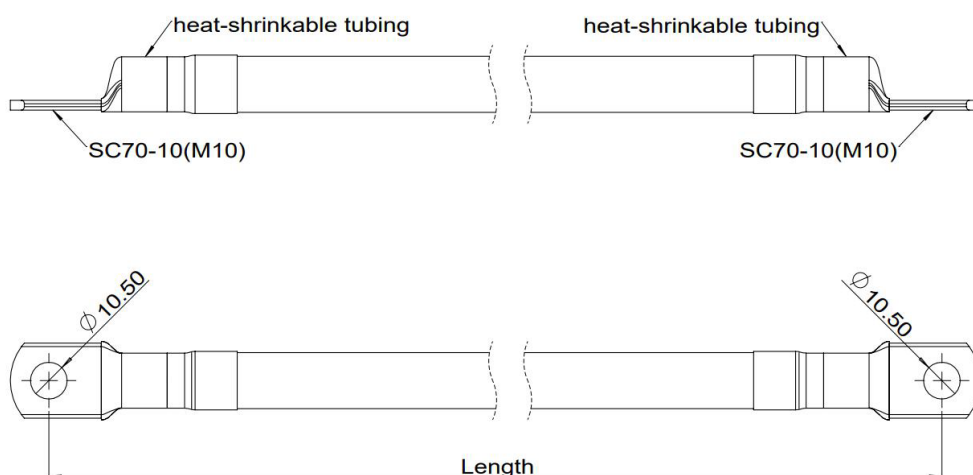

### 00AWG Power Cable