

# AC300


## Expandable Power At Your Will

Power For Long, Blackout Worries Gone





## All Your Need in One

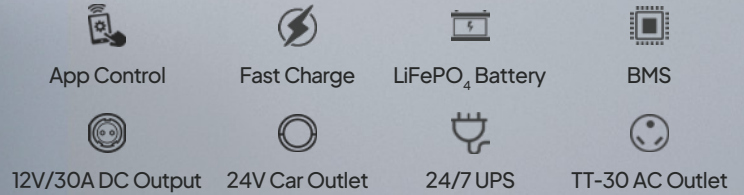

## Available Socket



### 24/7 UPS (uninterruptible power supply)

No need for complicated installation; simply place it anywhere in your house or garage. When a power outage occurs, the AC300 automatically kicks in and provides emergency power to your appliances in just 20ms.



### Customizable Power Solution

Experience true customization with the AC300. Its modular design allows you to tailor your power capacity to your exact needs. Just hook up to four \*B300 expansion batteries, and unlock a whopping capacity of 12,288Wh. With this generous supply, you can confidently energize your entire home or be ready for any sudden outages.

AC300+B300 (X1)	AC300+B300 (X2)	AC300+B300 (X3)	AC300+B300 (X4)
AC300 B300x1: 3072Wh	AC300 B300x2: 6144Wh	AC300 B300x3: 9216Wh	AC300 B300x4: 12288Wh AC300X2 B300X2-8 6000W/6144Wh~24,576Wh
<b>3,072Wh</b>	<b>6,144Wh</b>	<b>9,216Wh</b>	<b>12,288Wh</b>

Split Phase Bonding is available for 120V, Compatible with 2-8 \*B300

## AC300+B300

### ■ Specs

Model:	AC300+B300
Capacity:	3072Wh~12288Wh (1~4*B300)
Battery:	LiFePO <sub>4</sub> , 3,500+ life cycle
Output Power:	3,000W (6,000W surge) 6000W(Split Phase Bonding for 100/120V Model only)
Weight:	57kg / 125.7lbs (AC300+1*B300)
UPS:	Switching times 20ms
App Control:	WiFi & Bluetooth
Dimensions (Lx WxH)	52.0x32.5x35.8 cm / 20.5x12.5x14.1 in
Operating Temperature	32°F ~ 104°F / 0°C ~ 40°C
Storage Temperature	-4°F ~ 104°F / -20°C ~ 40°C

### ■ Input

AC Input:	3000W Max
Solar Charging:	12-150V, 2400W Max. Dual MPPT
Car Charging:	12 / 24V 8A
Solar + AC Charging:	5400W Max

### ■ Output

Cigarette Lighter Port x1:	24V / 10A
RV Portx1:	12V / 30A
USB-A x2:	5V 13A, 15W Max.
USB-A (QC3.0) x2:	18W Max.
USB-C x1:	100W Max.
For 100/120V Model	
AC Outlet x6 :	25A 100V / 50Hz / 60Hz(IP) / 30A 120V / 60Hz(US)
30A AC Outletx1:	TT-30 , 120V
Wireless Charging Pad x2	5 / 7.5 / 10 / 15W



Contact Us